AP9972GI

Pb Free Plating Product

Advanced Power Electronics Corp.

N-CHANNEL ENHANCEMENT MODE POWER MOSFET

- ▼ Low Gate Charge
- ▼ Single Drive Requirement
- ▼ Lower On-resistance



BV_{DSS}	60V
$R_{DS(ON)}$	18mΩ
I_D	35A

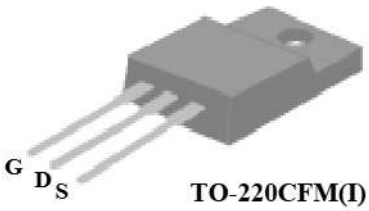

TO-220CFM(I)

Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TO-220CFM isolation package is universally preferred for all commercial-industrial through hole applications.

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage	±25	V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ 10V	35	A
I_D@T_C=100℃	Continuous Drain Current, V_{GS} @ 10V	22	A
I_{DM}	Pulsed Drain Current[1]	120	A
P_D@T_C=25℃	Total Power Dissipation	31.3	W
	Linear Derating Factor	0.25	W/℃
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter		Value	Units
Rthj-c	Thermal Resistance Junction-case	Max.	4	℃/W
Rthj-a	Thermal Resistance Junction-ambient	Max.	62	℃/W

Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=250uA	60	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25℃, I_D=1mA	-	0.06	-	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=10V, I_D=23A	-	-	18	mΩ
		V_{GS}=4.5V, I_D=12A	-	-	22	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250uA	1	-	3	V
g_{fs}	Forward Transconductance	V_{DS}=10V, I_D=23A	-	40	-	S
I_{DSS}	Drain-Source Leakage Current (T_j=25°C)	V_{DS}=60V, V_{GS}=0V	-	-	10	uA
	Drain-Source Leakage Current (T_j=150°C)	V_{DS}=48V ,V_{GS}=0V	-	-	25	uA
I_{GSS}	Gate-Source Leakage	V_{GS}=±25V	-	-	±100	nA
Q_g	Total Gate Charge[2]	I_D=23A	-	35	56	nC
Q_{gs}	Gate-Source Charge	V_{DS}=48V	-	9.5	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	V_{GS}=4.5V	-	20	-	nC
$t_{d(on)}$	Turn-on Delay Time[2]	V_{DS}=30V	-	12	-	ns
t_r	Rise Time	I_D=35A	-	37	-	ns
$t_{d(off)}$	Turn-off Delay Time	R_G=3.3Ω,V_{GS}=10V	-	47	-	ns
t_f	Fall Time	R_D=0.86Ω	-	59	-	ns
C_{iss}	Input Capacitance	V_{GS}=0V	-	3160	5060	pF
C_{oss}	Output Capacitance	V_{DS}=25V	-	280	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	230	-	pF
R_g	Gate Resistance	f=1.0MHz	-	1.6	2.4	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage[2]	I_S=23A, V_{GS}=0V	-	-	1.2	V
t_{rr}	Reverse Recovery Time	I_S=23A, V_{GS}=0V,	-	36	-	ns
Q_{rr}	Reverse Recovery Charge	dI/dt=100A/μs	-	45	-	nC

Notes:

1.Pulse width limited by Max. junction temperature.

2.Pulse width ≤300us , duty cycle ≤2%.

3.Starting T_j=25°C , V_{DD}=30V , L=1mH , R_G=25Ω , I_{AS}=30A.

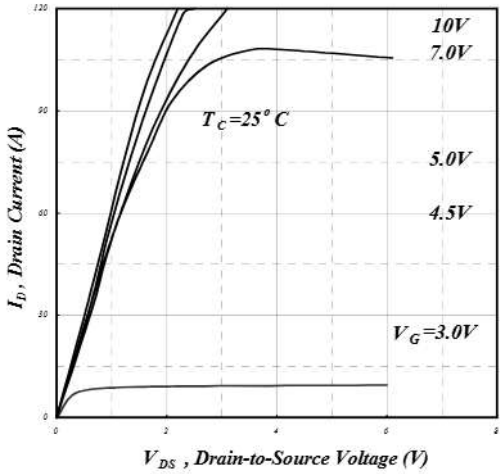

Fig 1. Typical Output Characteristics

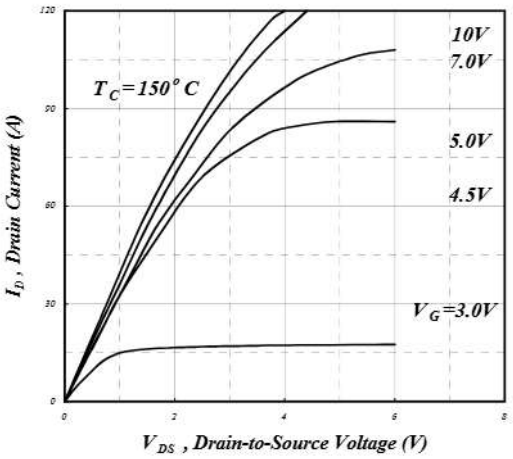

Fig 2. Typical Output Characteristics

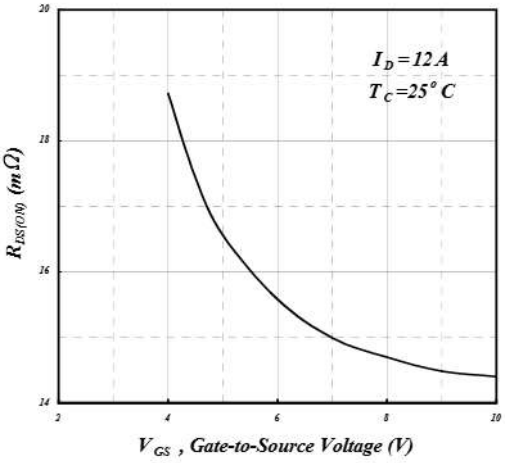

Fig 3. On-Resistance v.s. Gate Voltage

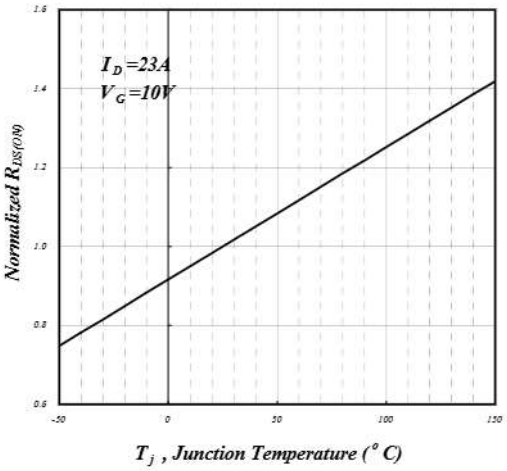

Fig 4. Normalized On-Resistance v.s. Junction Temperature

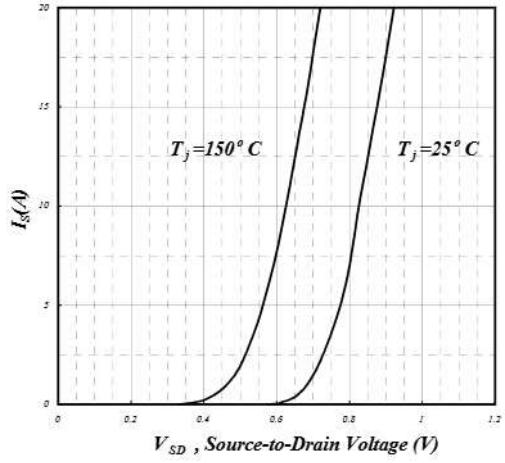

Fig 5. Forward Characteristic of Reverse Diode

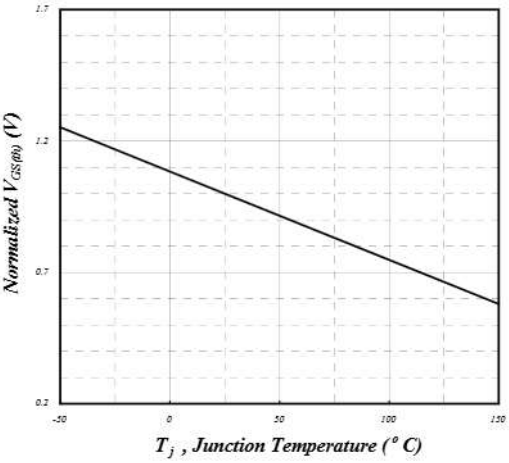

Fig 6. Gate Threshold Voltage v.s. Junction Temperature

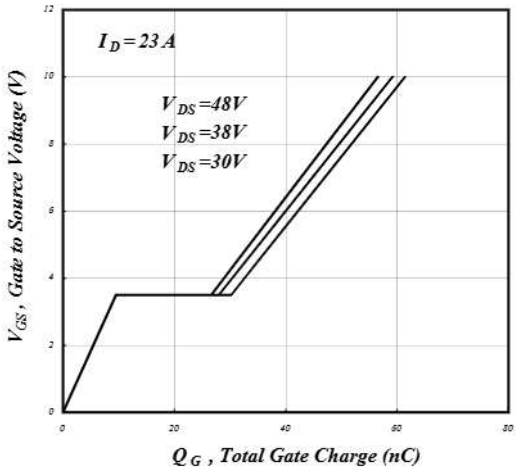

Fig 7. Gate Charge Characteristics

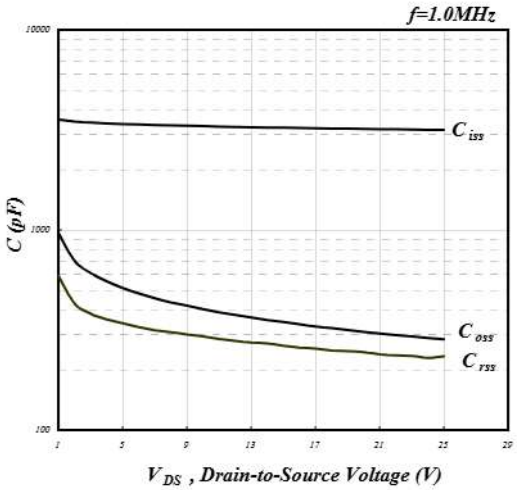

Fig 8. Typical Capacitance Characteristics

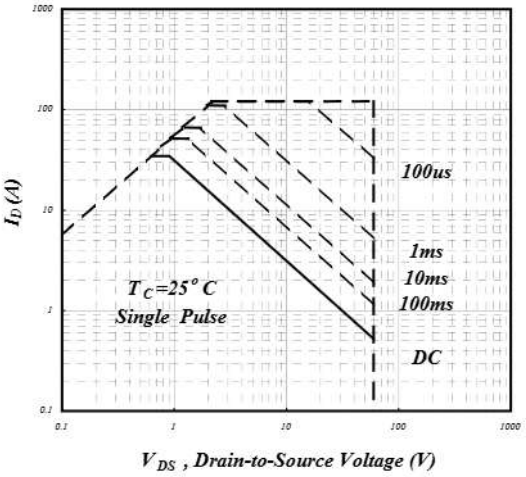

Fig 9. Maximum Safe Operating Area

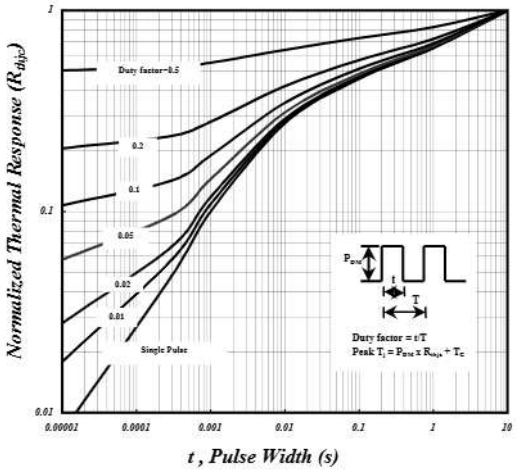

Fig 10. Effective Transient Thermal Impedance

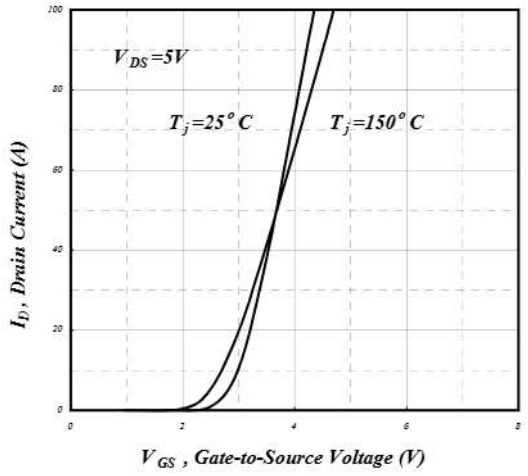

Fig 11. Transfer Characteristics

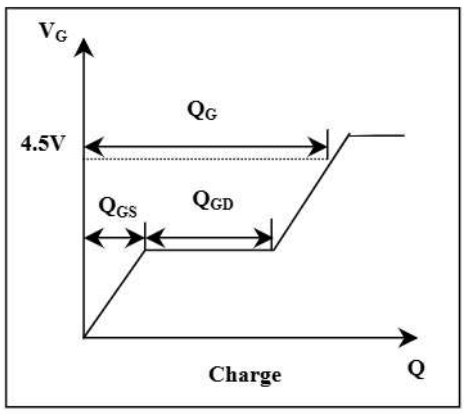

Fig 12. Gate Charge Waveform